


# "APS" MODEL

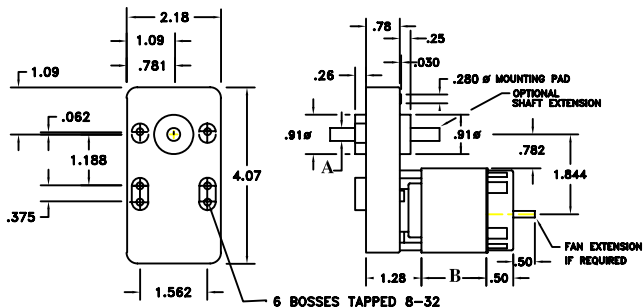

## AC REVERSIBLE GEARMOTOR

A - OUTPUT SHAFT DIAMETER & LENGTH PER CUSTOMER REQUIREMENTS.

B - 5/8" - 2" DEPENDING UPON RPM & TORQUE REQUIREMENTS

- \* OUTPUT SPEED FROM 1 - 800 RPM
- \* OUTPUT TORQUE TO 100 IN. LB.
- \* 24/120/240 VAC, 50/60 HZ
- \* CONTINUOUS OR INTERMITTANT DUTY
- \* SELF-RESETTING THERMAL PROTECTION
- \* U.L., C.S.A. & T.U.V. APPROVED
- \* 3 WIRE, PERMANENT SPLIT CAPACITOR CONSTRUCTION
- \* 18 GAUGE LEADS

## OPTIONS:

HIGH TEMPERATURE PLASTIC FAN,  
1 7/8" DIA. x 3/8" THICK  
HEAVY DUTY NEEDLE BEARINGS  
ADJUSTABLE CAMS & LIMIT SWITCHES  
CAPACITOR  
FRICTION BRAKES  
TERMINALS

REX ENGINEERING CORP.

TITUSVILLE, FL (321)268-5500