


"ASP" MODEL

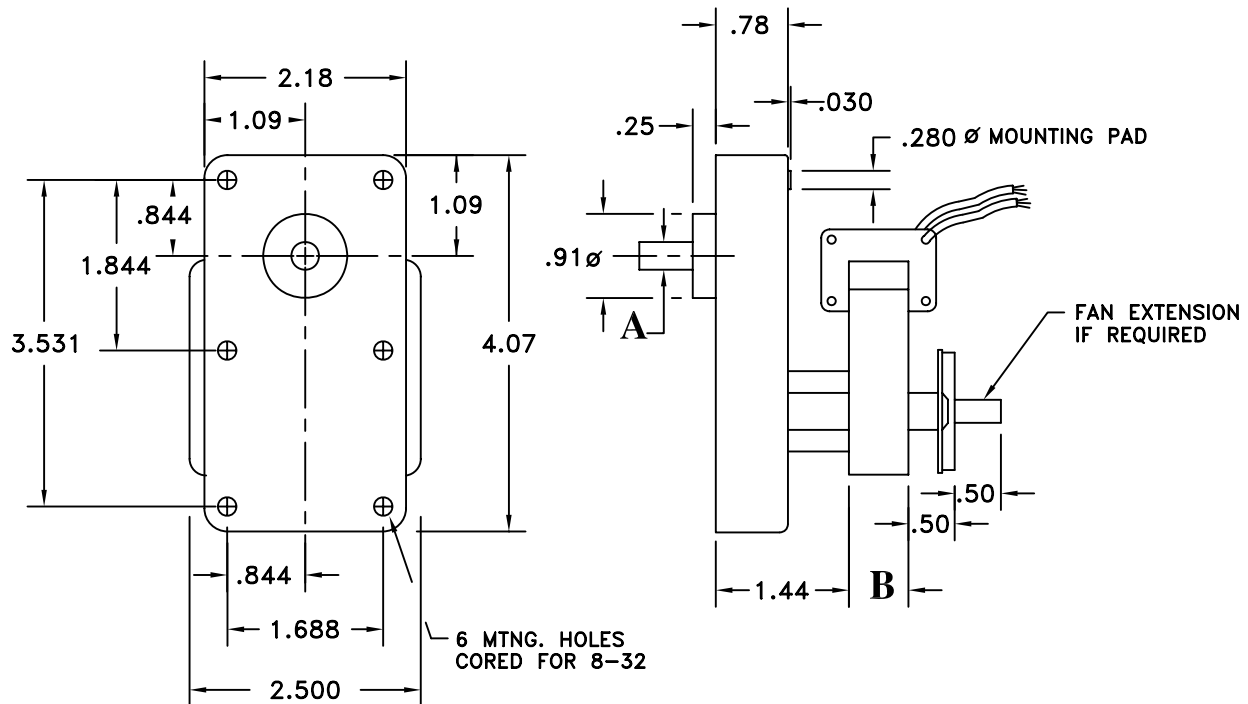

AC UNIDIRECTIONAL GEARMOTOR

A – OUTPUT SHAFT DIAMETER & LENGTH PER CUSTOMER REQUIREMENTS.

B – 5/8" – 2" DEPENDING UPON RPM & TORQUE REQUIREMENTS

- * OUTPUT SPEED FROM 1 – 800 RPM
- * OUTPUT TORQUE TO 100 IN. LB.
- * 24/120/240 VAC. 50/60 HZ
- * CONTINUOUS OR INTERMITTANT DUTY
- * SELF-RESETTING THERMAL PROTECTION
- * U.L., C.S.A. & T.U.V. APPROVED
- * 18 GAUGE LEADS

OPTIONS:

HIGH TEMPERATURE PLASTIC FAN,
2 1/2" DIA. x 3/4" THICK
HEAVY DUTY NEEDLE BEARINGS
FRICTION BRAKES
ADJUSTABLE CAMS & LIMIT SWITCHES
TERMINALS
ONE WAY CLUTCH

REX ENGINEERING CORP.

TITUSVILLE, FL (321)268-5500