


# "ASP" MODEL WITH DUAL SHAFT

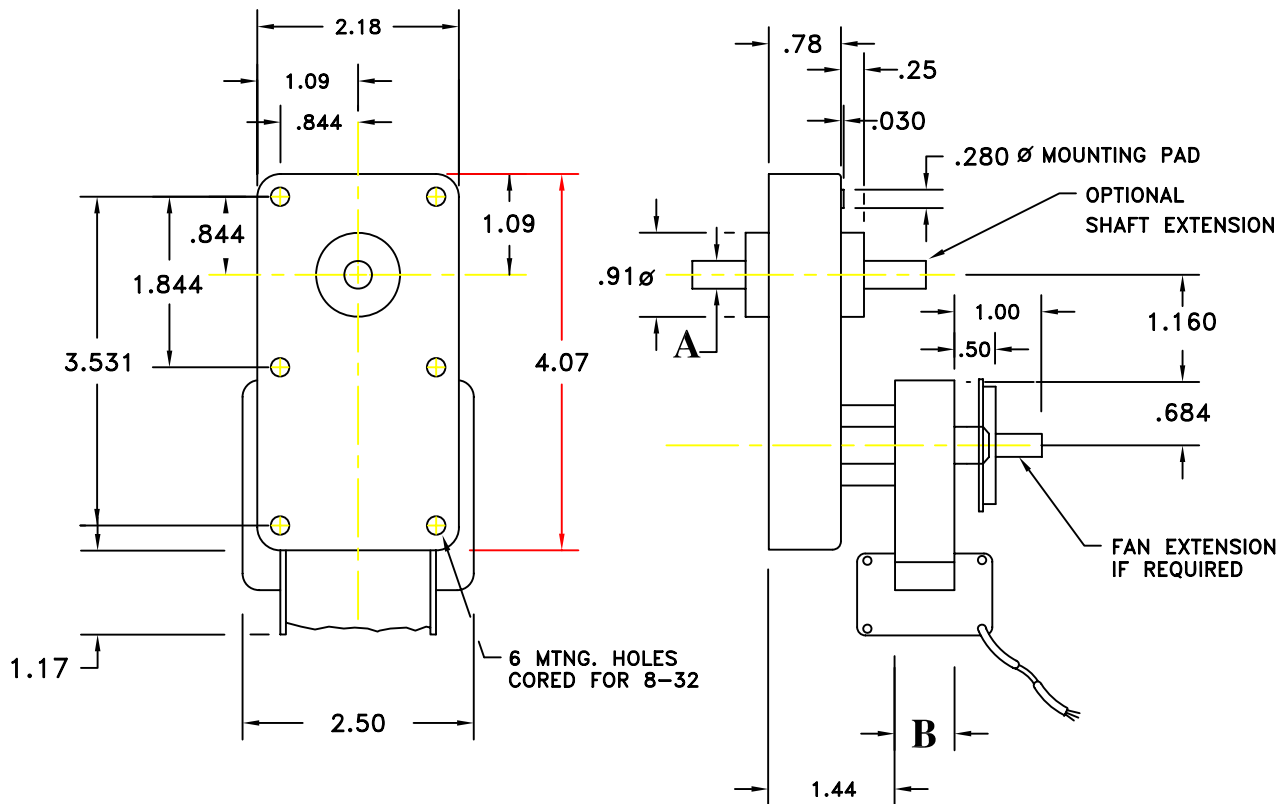

## AC UNIDIRECTIONAL GEARMOTOR

**A** – OUTPUT SHAFT DIAMETER & LENGTH PER CUSTOMER REQUIREMENTS.

**B** – 5/8" – 2" DEPENDING UPON RPM & TORQUE REQUIREMENTS

- \* OUTPUT SPEED FROM 1 – 800 RPM
- \* OUTPUT TORQUE TO 100 IN. LB.
- \* 24/120/240 VAC. 50/60 HZ
- \* CONTINUOUS OR INTERMITTANT DUTY
- \* SELF-RESETTING THERMAL PROTECTION
- \* U.L., C.S.A. & T.U.V. APPROVED
- \* 18 GAUGE LEADS

### OPTIONS:

- HIGH TEMPERATURE PLASTIC FAN,  
2 1/2" DIA. x 3/4" THICK
- HEAVY DUTY NEEDLE BEARINGS
- FRICTION BRAKES
- ADJUSTABLE CAMS & LIMIT SWITCHES
- TERMINALS

REX ENGINEERING CORP.

TITUSVILLE, FL (321)268-5500