"ASP" MODEL

WITH DUAL SHAFT

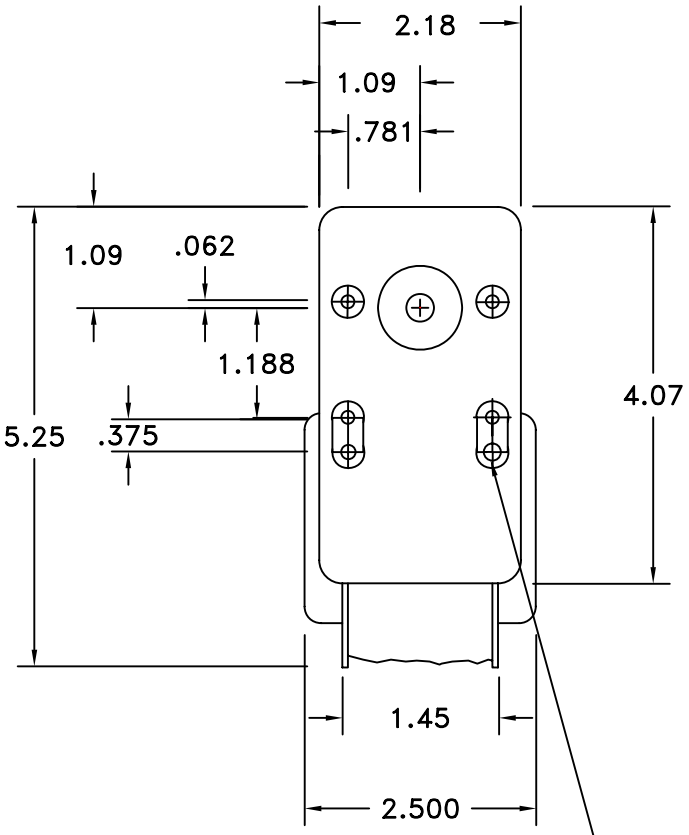

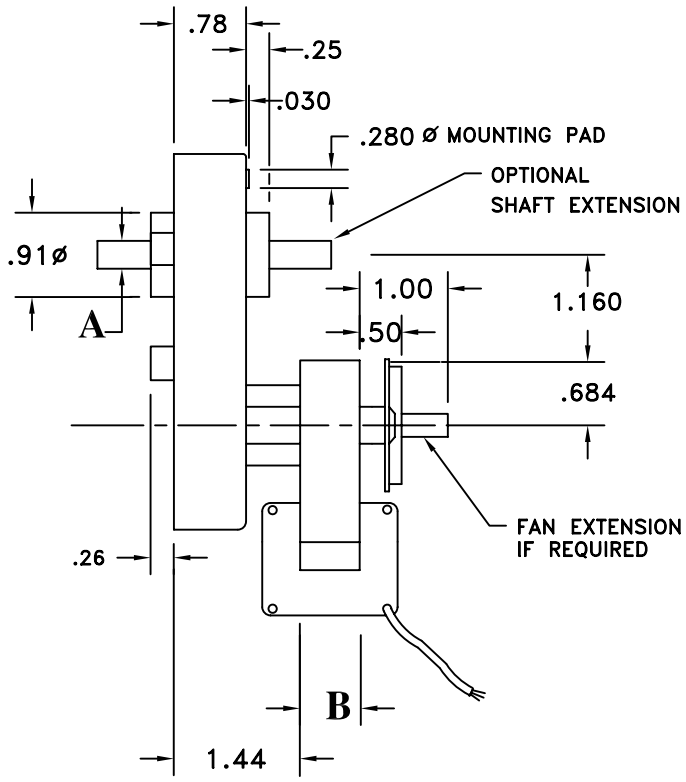

AC UNIDIRECTIONAL GEARMOTOR

6 BOSSES TAPPED 8–32

A – OUTPUT SHAFT DIAMETER & LENGTH PER CUSTOMER REQUIREMENTS.

B – 5/8" – 2" DEPENDING UPON RPM & TORQUE REQUIREMENTS

* OUTPUT SPEED FROM 1 – 800 RPM
* OUTPUT TORQUE TO 100 IN. LB.
* 24/120/240 VAC. 50/60 HZ
* CONTINUOUS OR INTERMITTANT DUTY
* SELF–RESETTING THERMAL PROTECTION
* U.L., C.S.A. & T.U.V. APPROVED
* 18 GAUGE LEADS

OPTIONS:

HIGH TEMPERATURE PLASTIC FAN,
2 1/2" DIA. x 3/4" THICK
HEAVY DUTY NEEDLE BEARINGS
FRICTION BRAKES
ADJUSTABLE CAMS & LIMIT SWITCHES
TERMINALS

REX ENGINEERING CORP.
TITUSVILLE, FL (321)268–5500