


# "B" MODEL

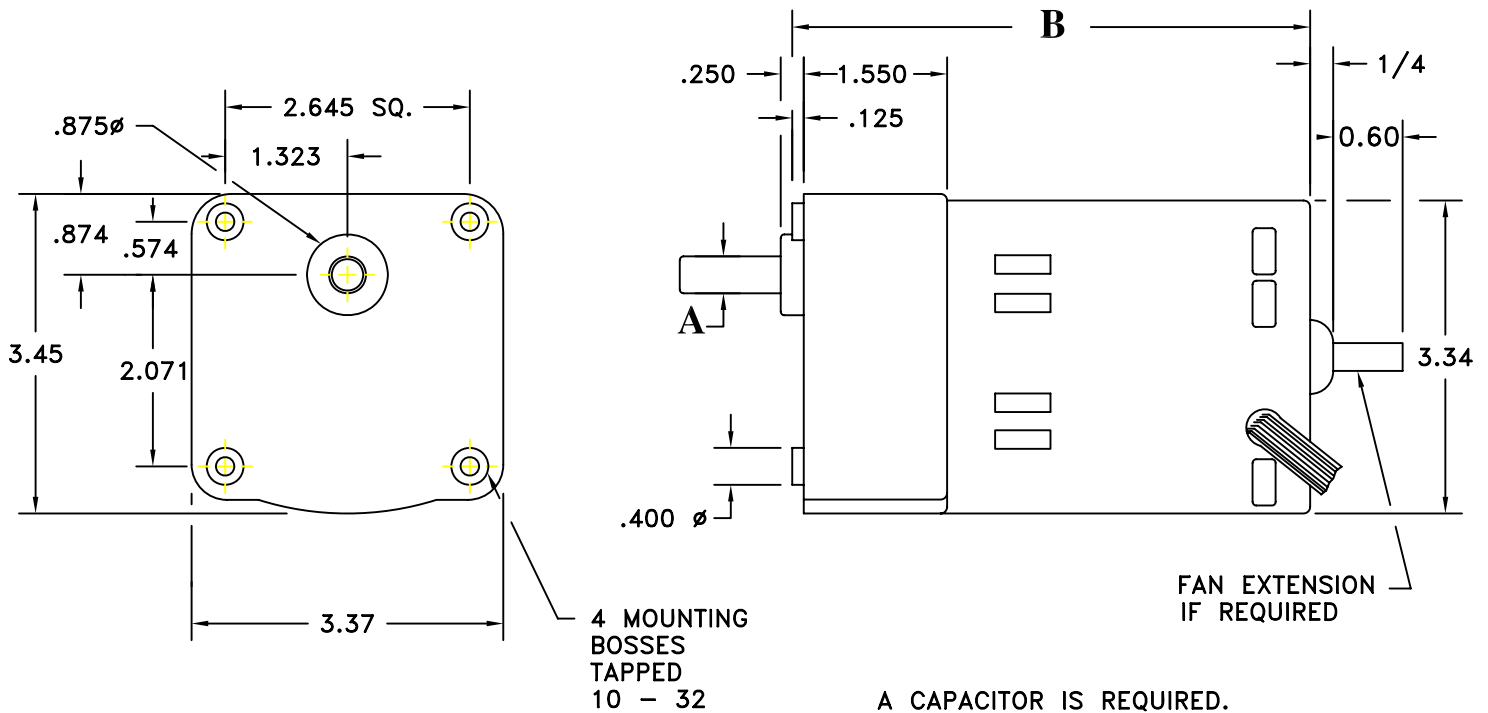

A CAPACITOR IS REQUIRED.  
IT CAN BE FURNISHED LOOSE,  
OR MOUNTED, WIRED, AND INSULATED.

## AC REVERSIBLE GEARMOTOR

**A** - OUTPUT SHAFT DETAILS PER CUSTOMER REQUIREMENTS.

**B** - 6.05 FOR 240 VOLTS  
5.75 FOR 120 VOLTS

- \* OUTPUT SPEED FROM 3 - 500 RPM
- \* OUTPUT TORQUE TO 250 IN. LB.
- \* CONTINUOUS DUTY WITH A FAN
- \* 120 OR 240 VAC, 50/60 HZ
- \* 1/10 HP
- \* HEAVY DUTY NEEDLE BEARINGS

## OPTIONS:

HIGH TEMPERATURE PLASTIC FAN,  
3 1/2" DIA.  
ELECTRO-MAGNETIC BRAKE

REX ENGINEERING CORP.

TITUSVILLE, FL (321) 268-5500