
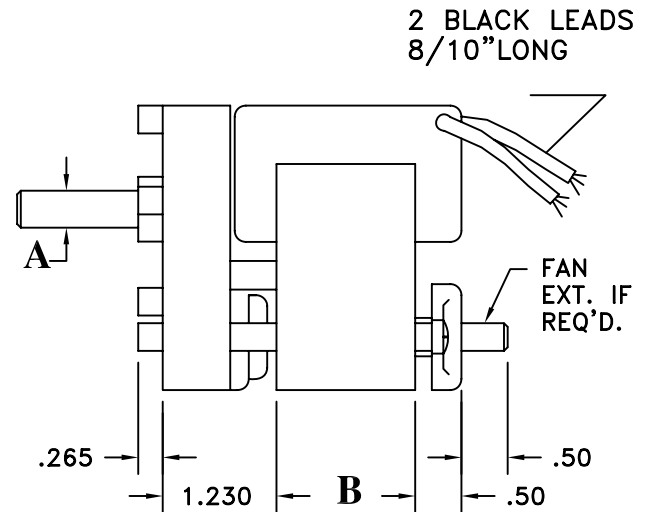


# "CMA" MODEL

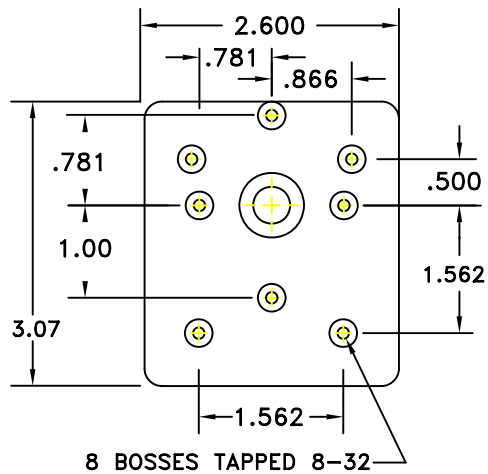

## AC UNIDIRECTIONAL GEARMOTOR

**A** – OUTPUT SHAFT DIAMETER & LENGTH PER CUSTOMER REQUIREMENTS.

**B** – FROM 5/8" TO 2" DEPENDING UPON R.P.M. AND LOAD REQUIREMENTS.

- \* OUTPUT SPEED FROM 2 – 500 RPM
- \* OUTPUT TORQUE TO 50 IN. LB.
- \* 24/120/240 VAC/ 50/60 HZ
- \* CONTINUOUS OR INTERMITTANT DUTY
- \* SELF-RESETTING THERMAL PROTECTION
- \* U.L., C.S.A. & T.U.V. APPROVED
- \* 18 GAUGE LEADS

## OPTIONS:

2.5"∅ PLASTIC COOLING FAN  
HEAVY DUTY NEEDLE BEARING  
FRICTION BRAKES  
TERMINALS  
ONE WAY CLUTCH

REX ENGINEERING CORP.

TITUSVILLE, FL(321)268-5500