"CMB" MODEL

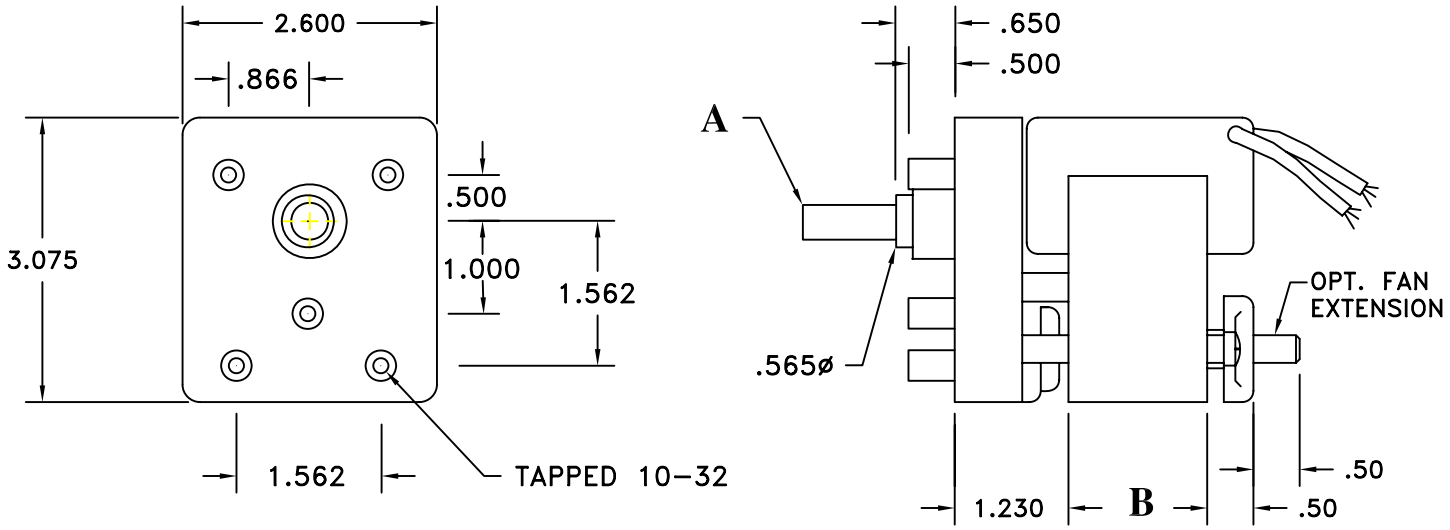

AC UNDIRECTIONAL GEARMOTOR

A – OUTPUT SHAFT DIAMETER & LENGTH PER CUSTOMER REQUIREMENTS.

B – FROM 5/8" TO 2" DEPENDING UPON R.P.M. AND LOAD REQUIREMENTS.

* OUTPUT SPEED FROM 2 – 500 RPM
* OUTPUT TORQUE TO 50 IN. LB.
* 24/120/240 VAC/ 50/60 HZ
* CONTINUOUS OR INTERMITTANT DUTY
* SELF-RESETTING THERMAL PROTECTION
* U.L., C.S.A. & T.U.V. APPROVED
* 18 GAUGE LEADS

OPTIONS:

HIGH TEMPERATURE PLASTIC FAN,
2 1/2" ø x 3/4" THICK
HEAVY DUTY NEEDLE BEARINGS
FRICTION BRAKES
TERMINALS
ONE WAY CLUTCH

REX ENGINEERING CORP.
TITUSVILLE, FL (321)268-5500