


"EPS" MODEL

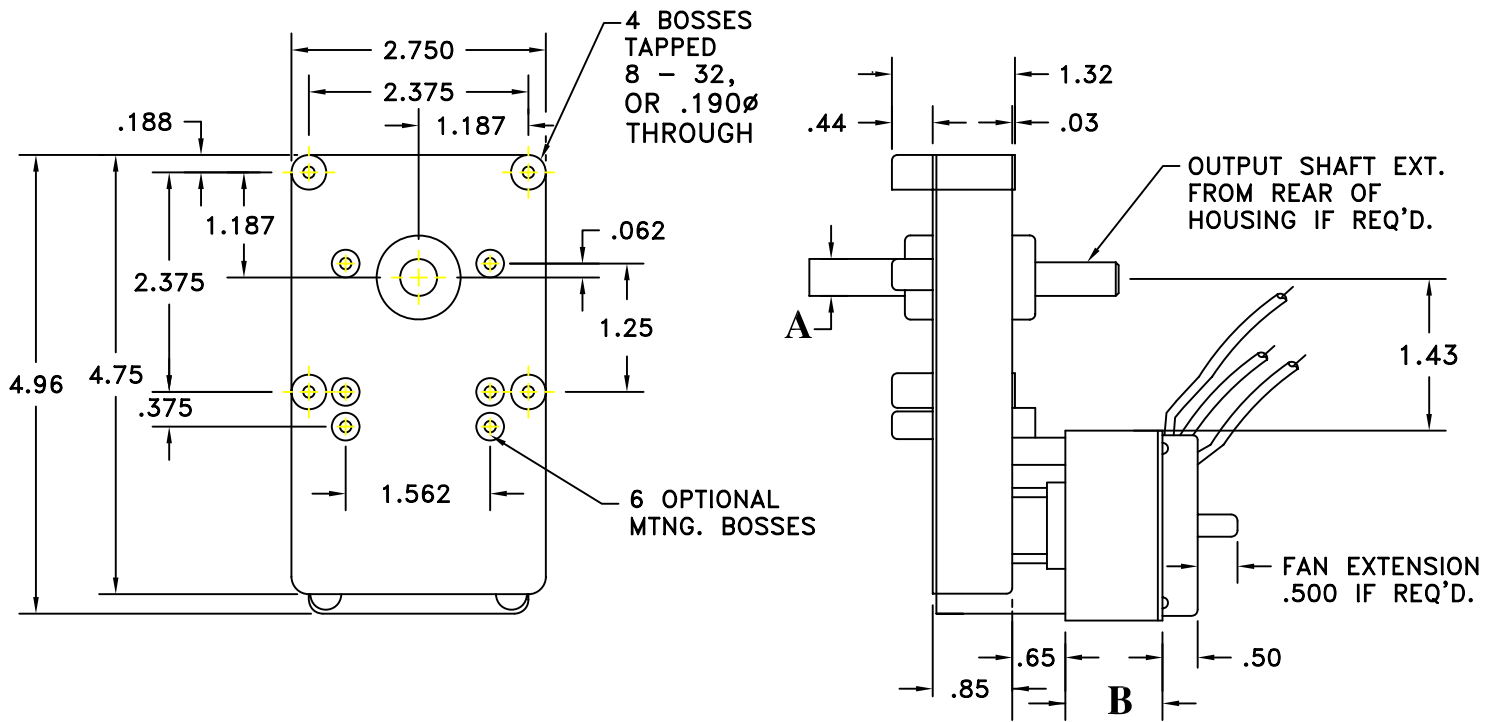

AC REVERSIBLE GEARMOTOR

A - OUTPUT SHAFT DETAILS PER CUSTOMER REQUIREMENTS.

B - 5/8" - 2" DEPENDING UPON RPM & TORQUE REQUIREMENTS

- * OUTPUT SPEED FROM 1 - 800 RPM
- * OUTPUT TORQUE TO 250 IN. LB.
- * 24/120/240 VAC. 50/60 HZ
- * CONTINUOUS OR INTERMITTANT DUTY
- * SELF-RESETTING THERMAL PROTECTION
- * U.L. & C.S.A. APPROVED
- * 3 WIRE, PERMANENT SPLIT CAPACITOR CONSTRUCTION
- * 18 GAUGE LEADS

OPTIONS:

- HIGH TEMPERATURE PLASTIC FAN,
1 7/8" DIA. x 3/8" THICK
- HEAVY DUTY NEEDLE BEARINGS
- ADJUSTABLE CAMS & LIMIT SWITCHES
- CAPACITOR
- FRICITION BRAKES
- TERMINALS
- MANUAL OVER-RIDE

REX ENGINEERING CORP.

TITUSVILLE, FL (321) 268-5500