


# "ESP" MODEL

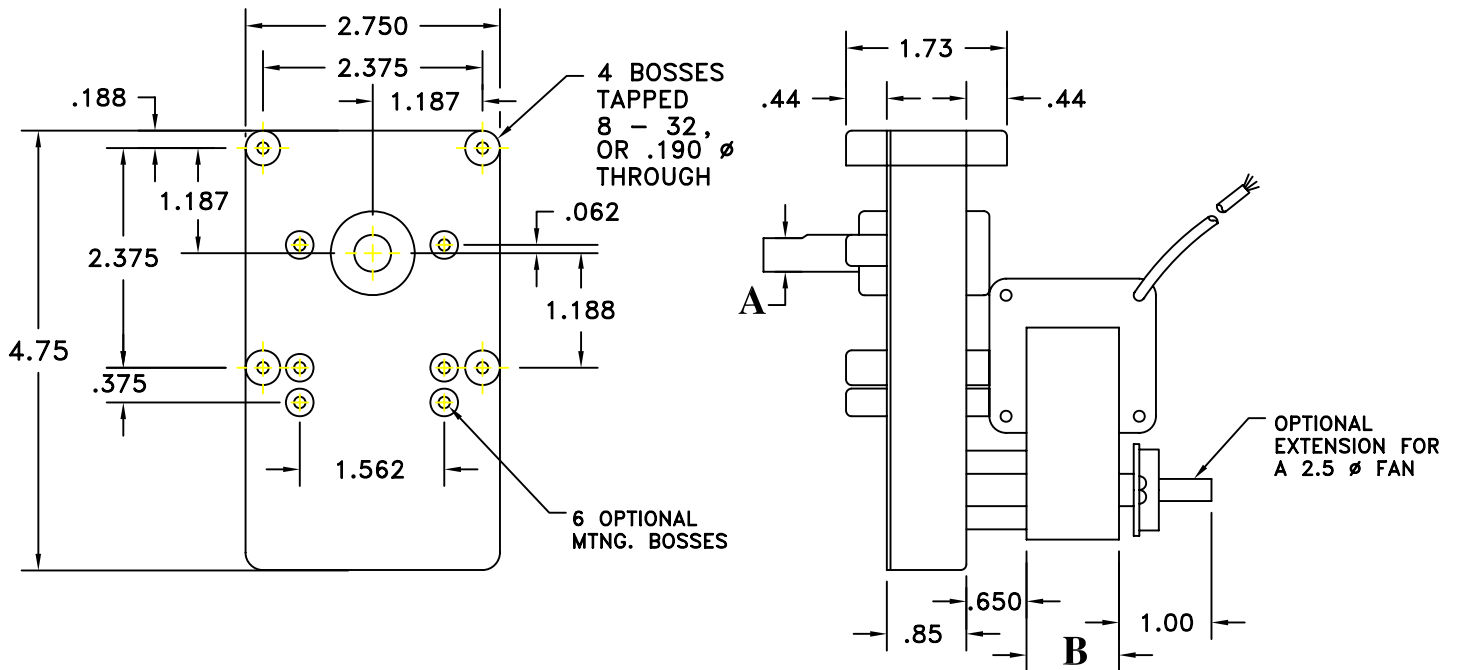

## AC UNIDIRECTIONAL GEARMOTOR

**A** - OUTPUT SHAFT DETAILS PER CUSTOMER REQUIREMENTS.

**B** - 5/8" - 2" DEPENDING UPON RPM & TORQUE REQUIREMENTS

- \* OUTPUT SPEED FROM 1 - 800 RPM
- \* OUTPUT TORQUE TO 250 IN. LB.
- \* 24/120/240 VAC. 50/60 HZ
- \* CONTINUOUS OR INTERMITTANT DUTY
- \* SELF-RESETTING THERMAL PROTECTION
- \* U.L., C.S.A. & T.U.V. APPROVED
- \* 18 GAUGE LEADS

### OPTIONS:

HIGH TEMPERATURE PLASTIC FAN,  
2 1/2" DIA. x 3/4" THICK  
HEAVY DUTY NEEDLE BEARINGS  
ADJUSTABLE CAMS & LIMIT SWITCHES  
FRICTION BRAKES  
TERMINALS  
ONE WAY CLUTCH

REX ENGINEERING CORP.

TITUSVILLE, FL (321)268-5500