


"ESP" MODEL w/DUAL SHAFT

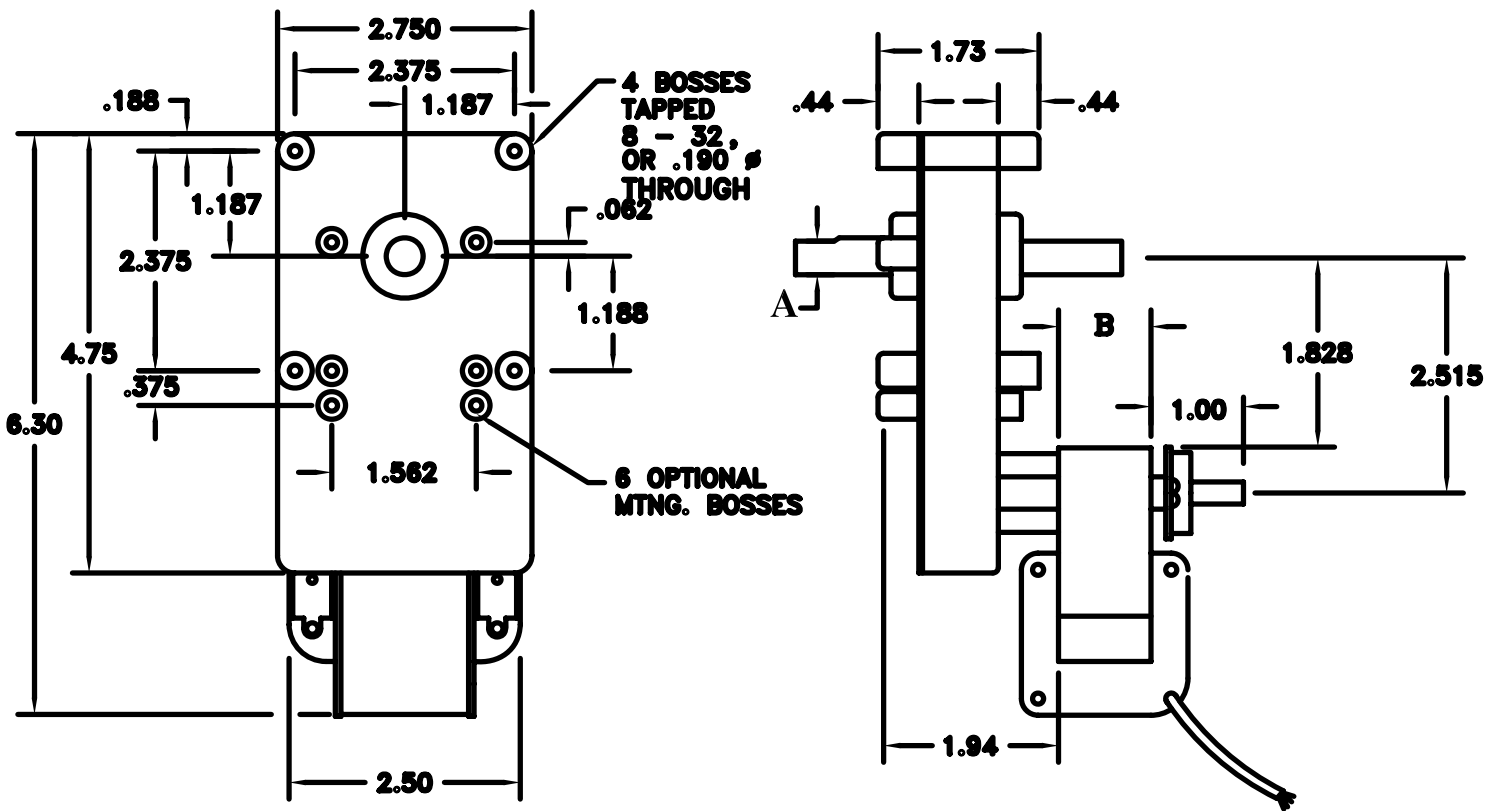

AC UNIDIRECTIONAL GEARMOTOR

A - OUTPUT SHAFT DETAILS PER CUSTOMER REQUIREMENTS.

B - 5/8" - 2" DEPENDING UPON RPM & TORQUE REQUIREMENTS

- * OUTPUT SPEED FROM 1 - 800 RPM
- * OUTPUT TORQUE TO 250 IN. LB.
- * 24/120/240 VAC. 50/60 HZ
- * CONTINUOUS OR INTERMITTANT DUTY
- * SELF-RESETTING THERMAL PROTECTION
- * U.L., C.S.A. & T.U.V. APPROVED
- * 18 GAUGE LEADS

OPTIONS:

- HIGH TEMPERATURE PLASTIC FAN,
2 1/2" DIA. x 3/4" THICK
- HEAVY DUTY NEEDLE BEARINGS
- ADJUSTABLE CAMS & LIMIT SWITCHES
- FRICTION BRAKES
- TERMINALS
- MANUAL OVER-RIDE
- ONE WAY CLUTCH

REX ENGINEERING CORP.

TITUSVILLE, FL (321) 268-5500